




慈溪市万捷电子有限公司




CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE



P.C.B. LAYOUT

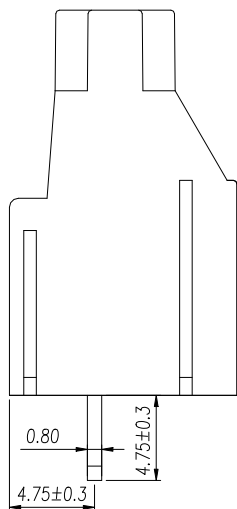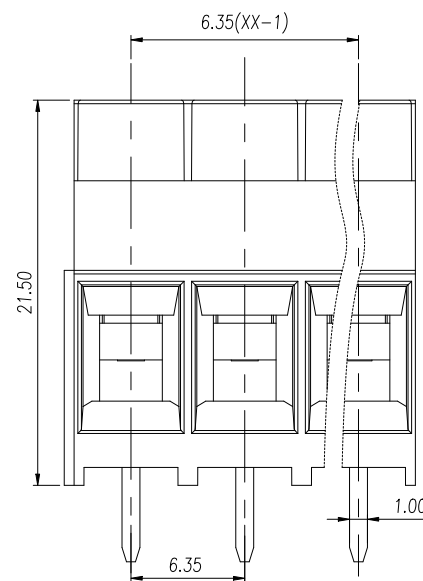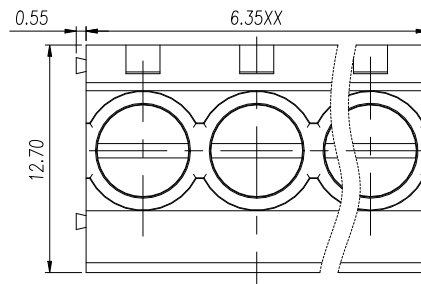

UL/CUL 技术参数

UL/CUL Technical Data



等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	30	-	10
接线范围	Wire Range	26-10		
单/多芯线	Solid/Stranded [AWG]			
耐电压	Withstanding Voltage	1600V/1Min		

IEC 技术参数

IEC Technical Data



过电压类别	Overvoltage Category	III	III	II
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	400	630	1000
额定电流	Rated Current [A]	32	32	32
额定冲击电压	Impulse withstand voltage [KV]	6.0	6.0	6.0

导线截面积	Conductor cross section	0.5-4.0		
硬质/柔性导线	Solid/flexible [mm ²]			


材料 Material

绝缘材料	Insulation Material	PA66		
阻燃等级	Imflamability	UL94V-0		
导体材料	Contact Material	铜合金 Copper alloy		
导体表面镀层	Contactive Coating	镀锡 Sn Plated		

一般参数 Other Data

间距	Pitch / 极数 Poles	[mm] / [P]	6.35 / 02-24	
剥线长度	Stripping Length	[mm]	6~7	
螺丝	Screw/ 扭矩 Torque(Max)	[N.m]	M3/0.5	
工作温度	Operating temperature	[°C]	-40~105	
焊锡温度	Soldering temperature		260°C/5S	
引针尺寸	Pin Dimensions	[mm]	0.8*1.0	
PCB板孔径	PCB Hole Diameter	[mm]	Ø1.5	

linear dimension(Tolerances Standard GB/T 14486-2008)




variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

单位 / UNITS mm 尺寸 / SIZE A4 比例 / SCALE 2.5:1 第三视角 / THIRD ANGLE PROJECTION 版本 / REV V0



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

名称 /
TITLE



WJ635-6.35-XXP-1YY-00A